

## Probability of Pout, Normal Distribution Fit

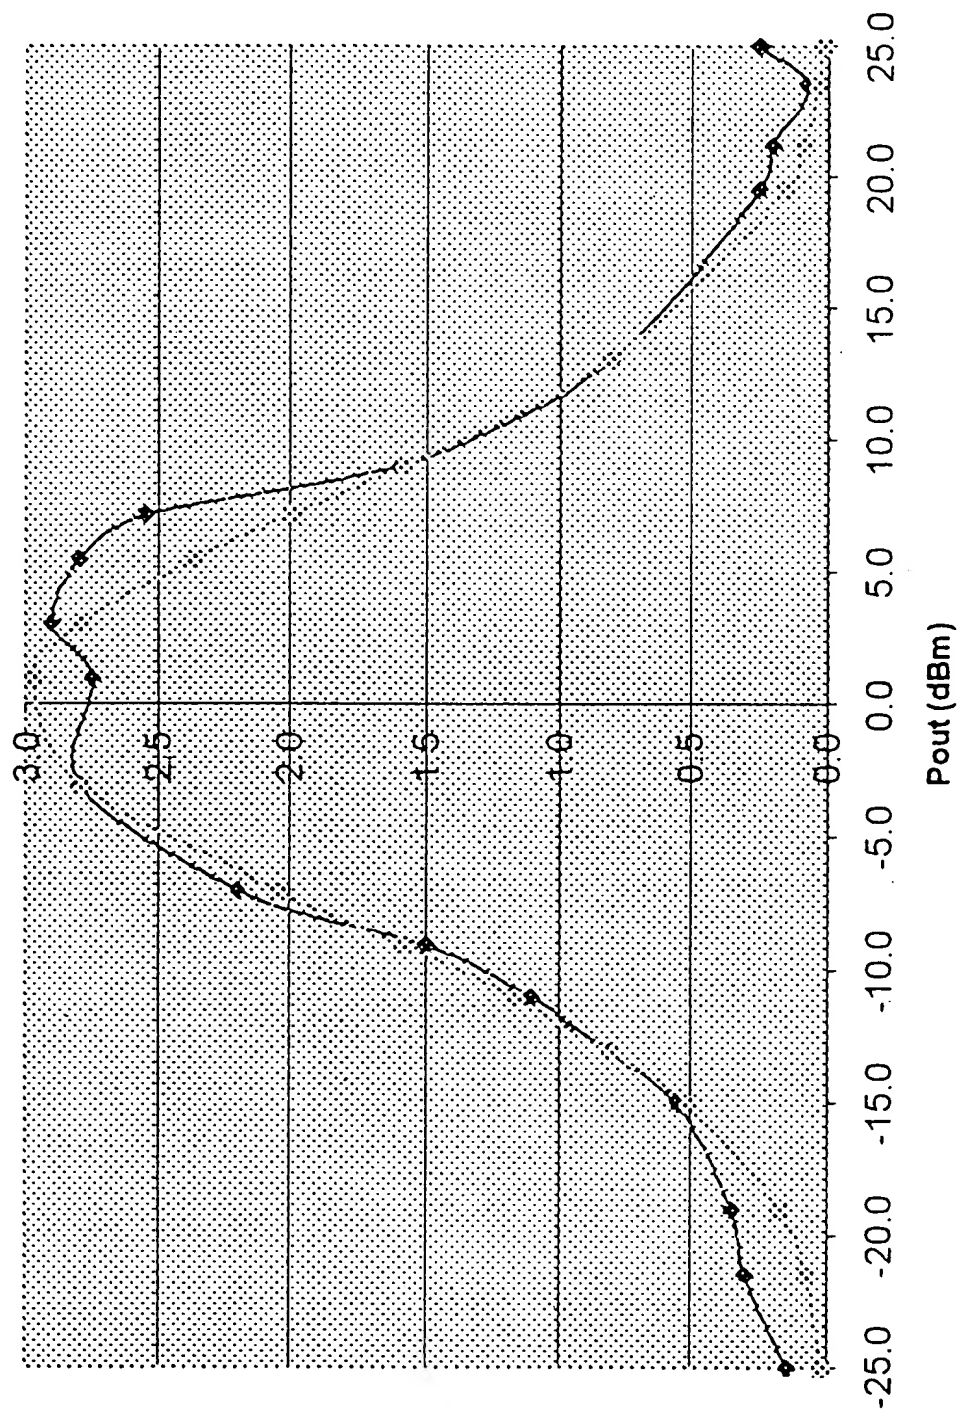


Figure 1

FORM 22-2880

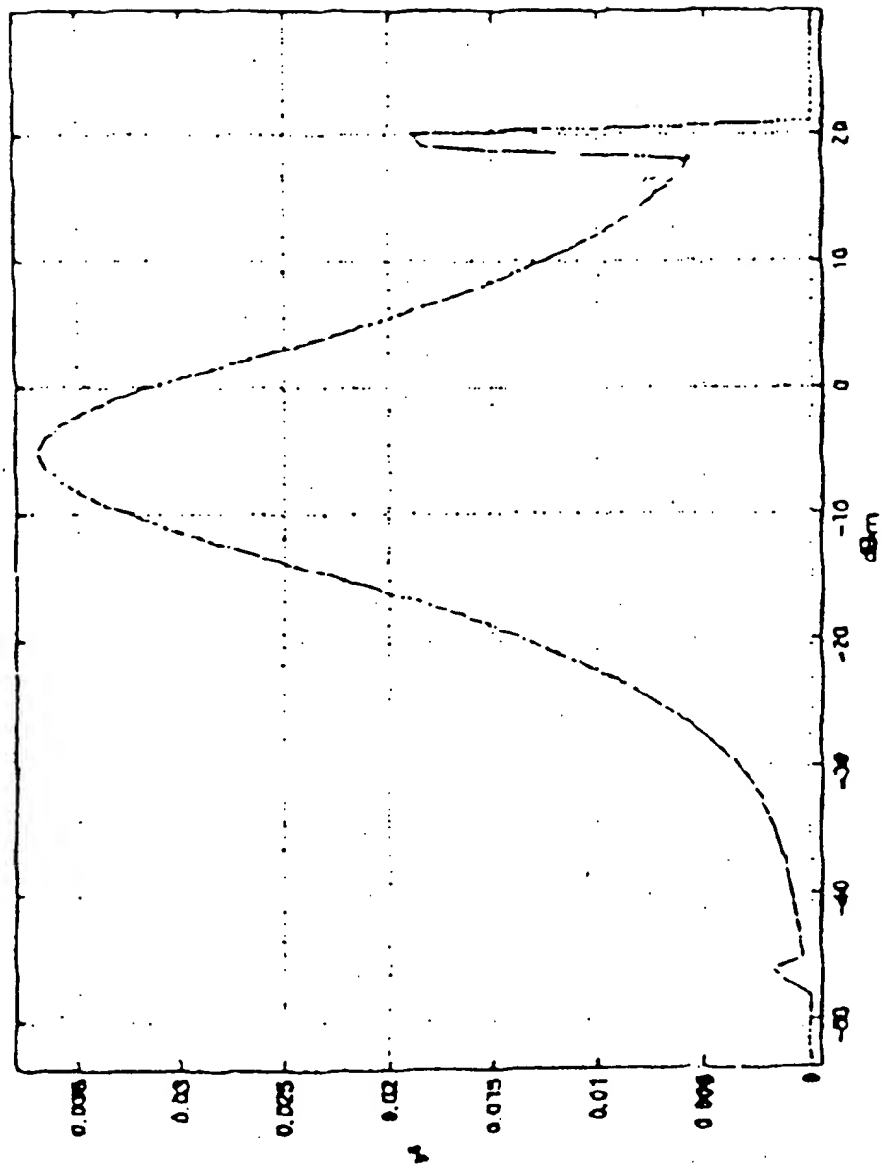


Figure 2

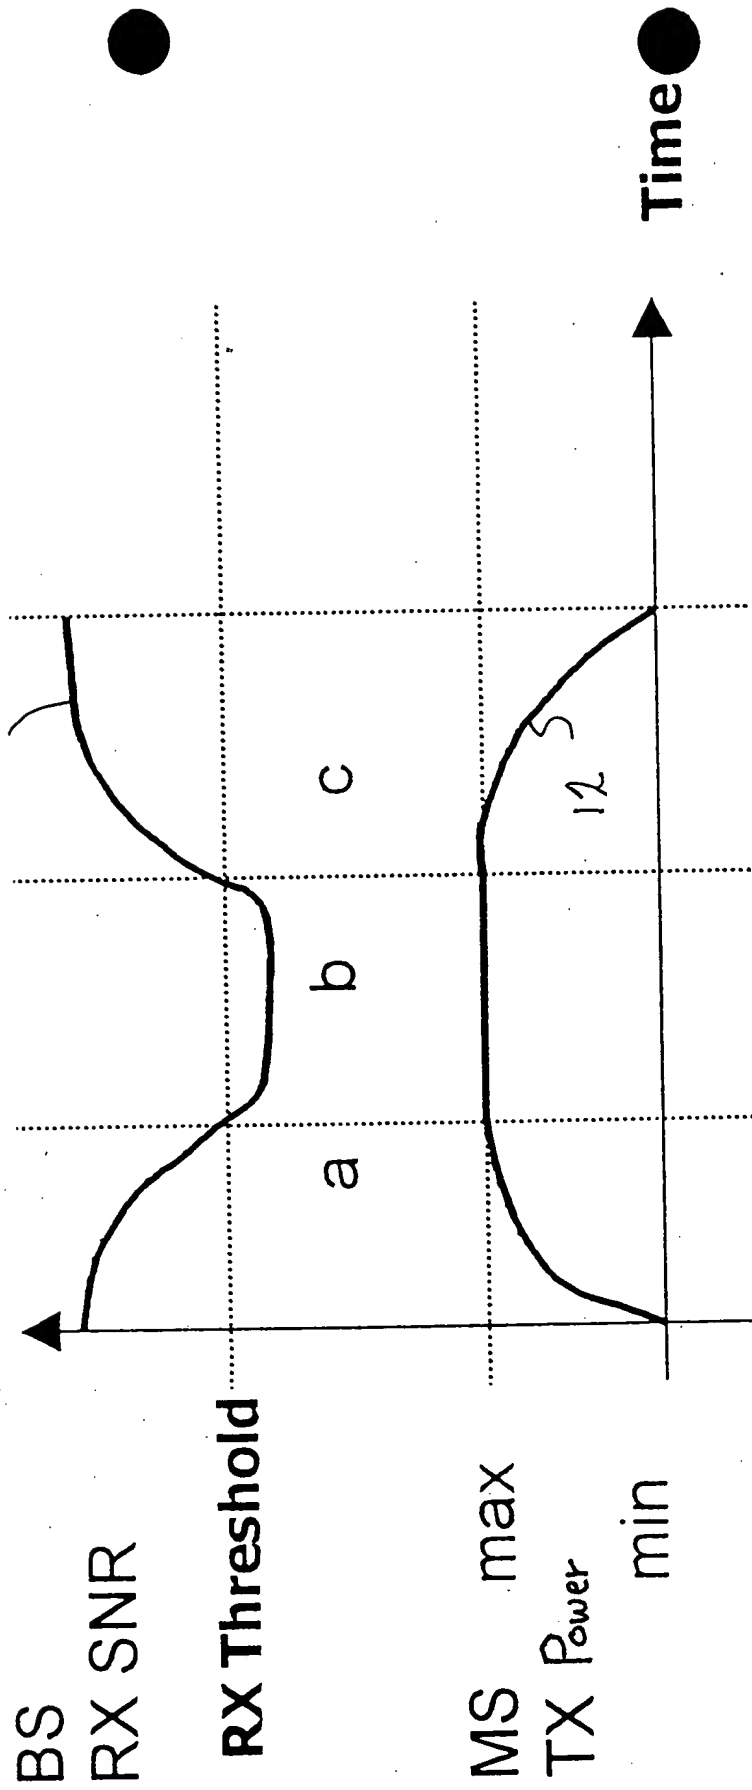


Figure 3

a b c

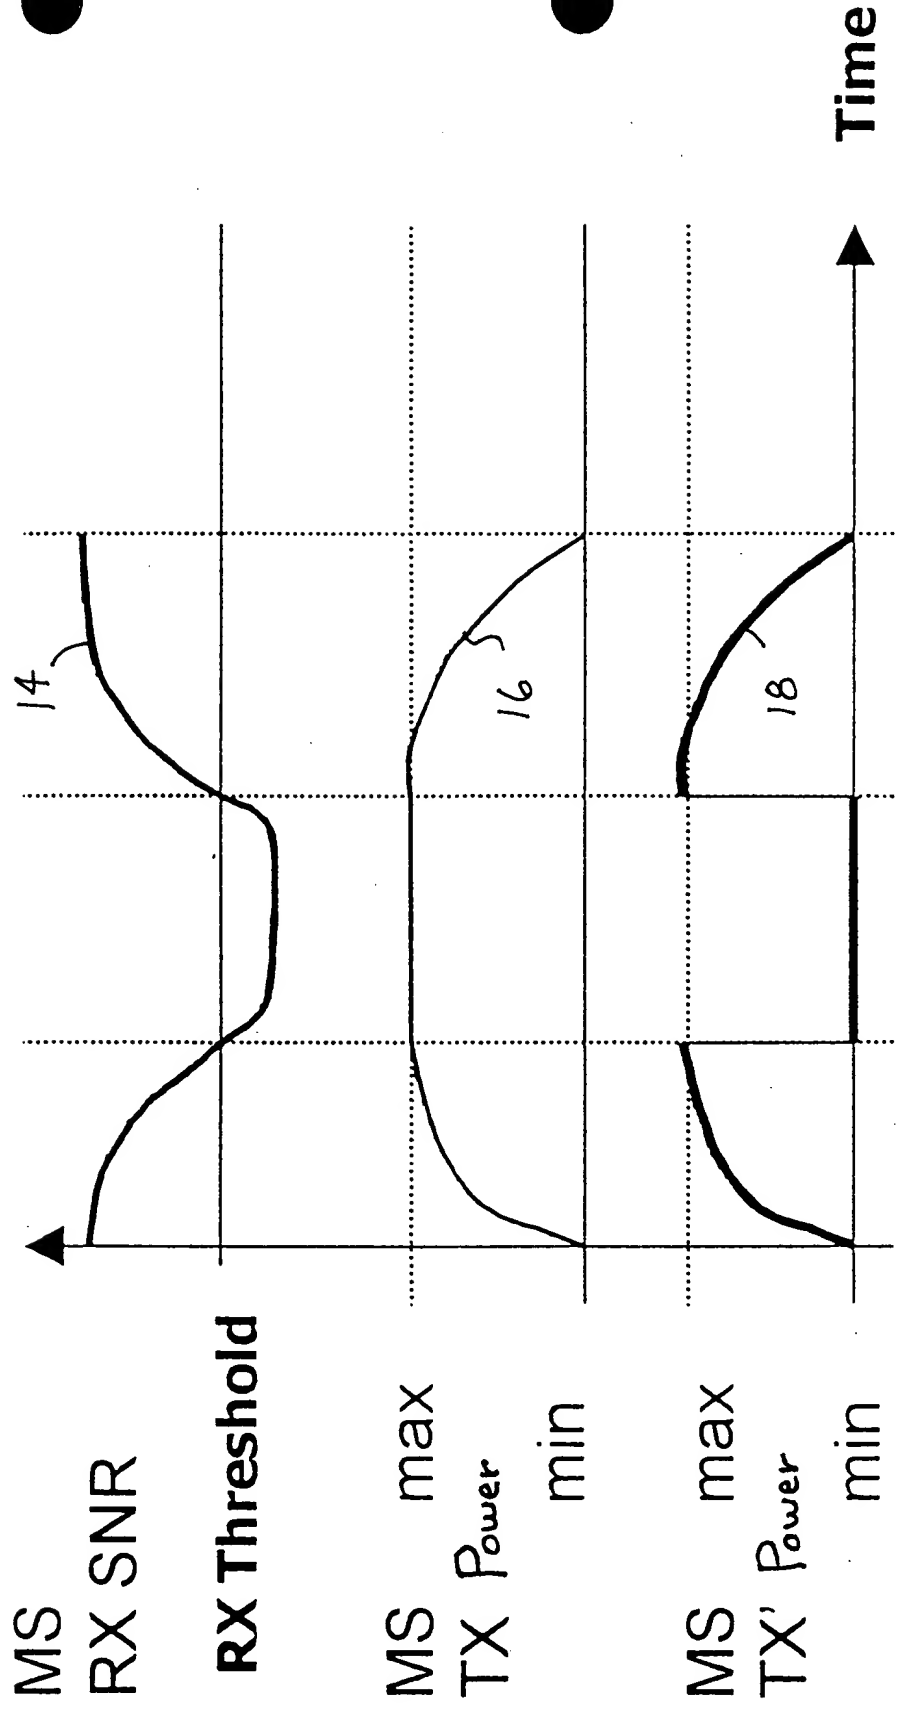


Figure 4

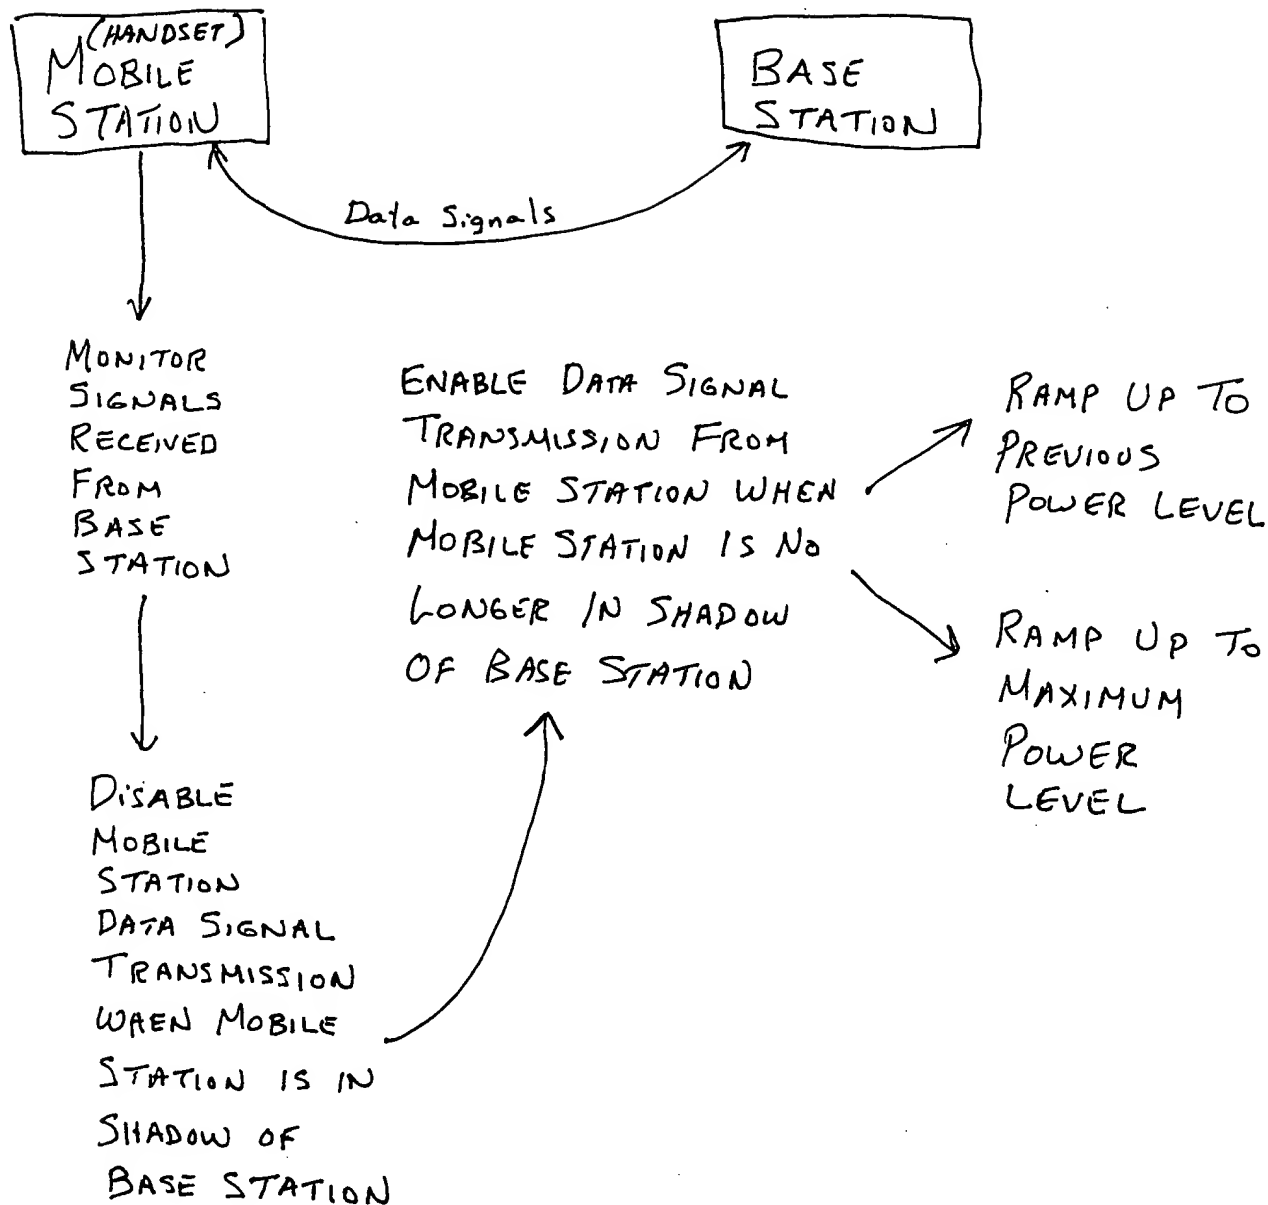


FIGURE 5


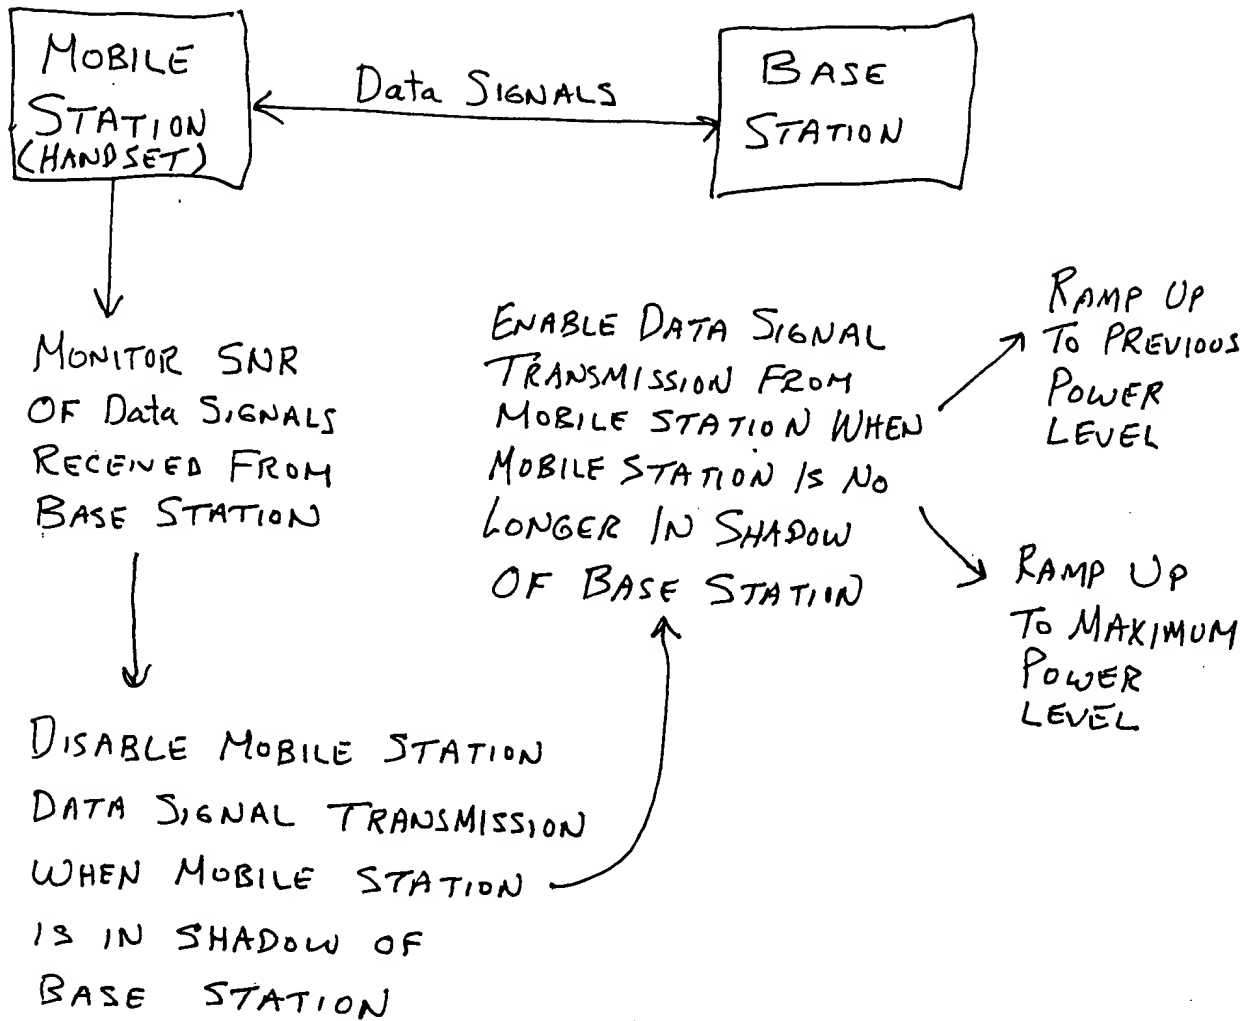


FIGURE 6



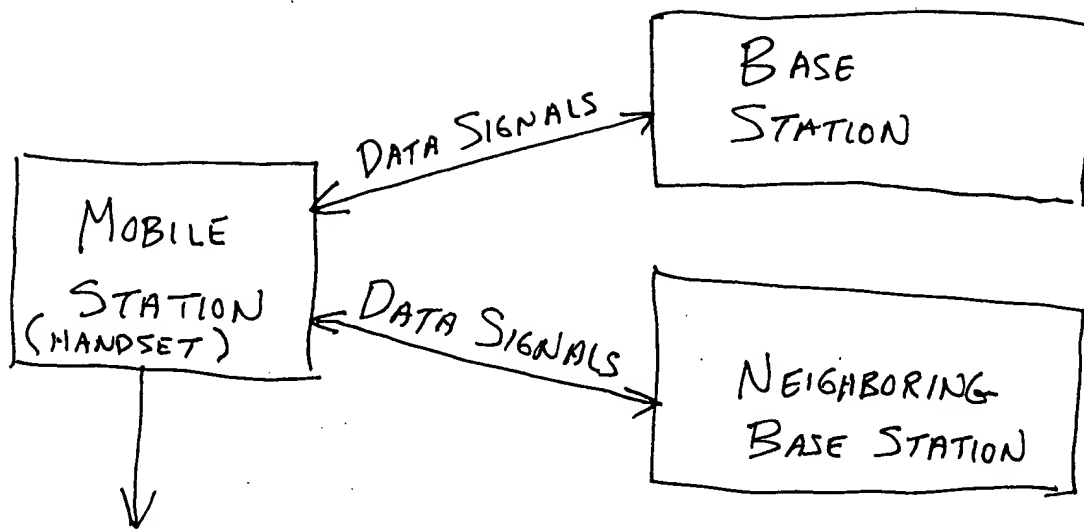

COMPARE DATA SIGNAL  
DELAYS BETWEEN DATA  
SIGNALS RECEIVED FROM  
BASE STATION AND  
NEIGHBORING BASE STATION

DISABLE DATA SIGNAL  
TRANSMISSION FROM  
MOBILE STATION WHEN  
MOBILE STATION IS IN  
SHADOW OF BASE STATION

ENABLE DATA SIGNAL  
TRANSMISSION FROM  
MOBILE STATION WHEN  
MOBILE STATION IS NO  
LONGER IN SHADOW

RAMP UP TO  
PREVIOUS  
POWER LEVEL

RAMP UP TO  
MAXIMUM  
POWER LEVEL

FIGURE 8



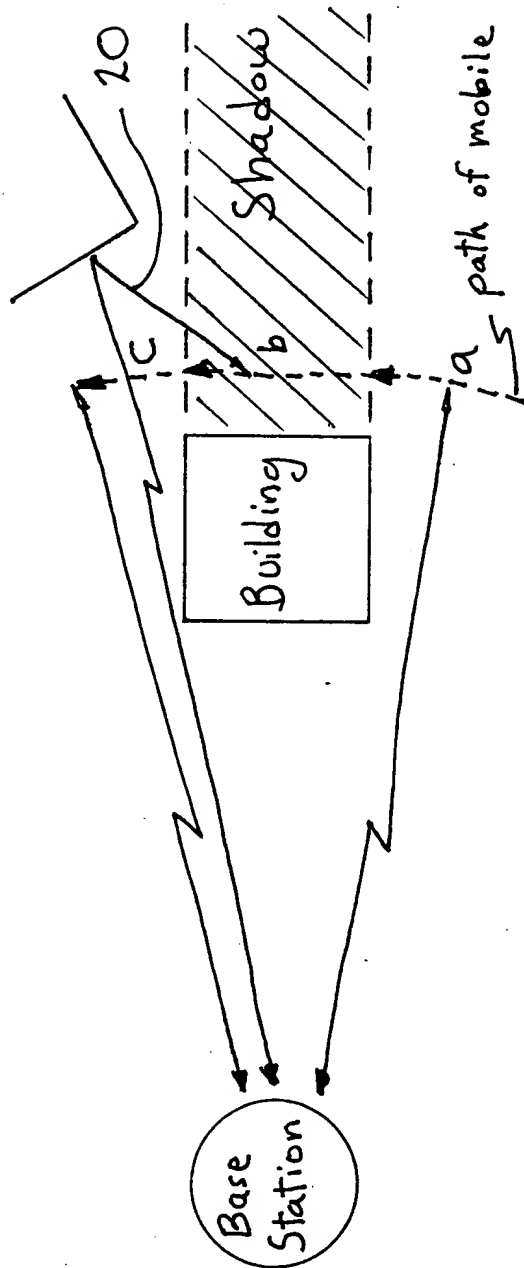


Figure 9